

Anti-Slip Safety Solutions Pty Ltd

Slip prevention, remedial cleaning & sealing specialists since 1996


CALL 1300 667 547 Mobile 0418 828 850

Fax: 02 9383 8575 or 1300 723 222 Website: www.asssco.com.au

Email: info@asssco.com.au PO Box 207 Concord NSW 2137

ABN 53 133 555 601

AS3 PRODUCT INFORMATION SHEET

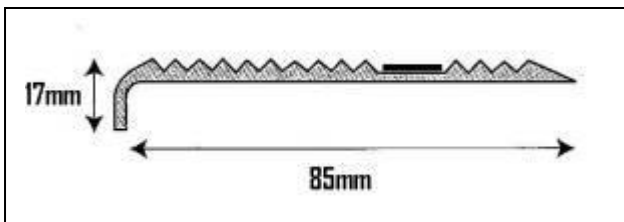

AS3 Stair Nosing has a solid ripple trim aluminium finish with a narrow anti-slip tape insert to cover fitting screws. AS3 can be applied to any hard surface step such as; tiles (repair broken step edge), timber or concrete. It has particularly good application for fire escape stairs. Meets AS 1428:1-2009 for Visually Impaired.

Aluminium Our profiles are extruded from 6060/T5 Alloy; this can be interchanged with 6063/T5. Both alloys are architectural grade with good surface finish and very good corrosion resistance.

Anodising Aluminium profiles are anodised 15 – 20 microns in accordance with AS 1231:2000. The following finishes are available; Clear (Natural Silver) Gold (Summer Maize) and Bronze (Amber Gold).

Powder Coating (electrostatic powder spray) finishes are available in: Black, and yellow. Custom anodising or powder coating is available on request.

Inserts The AS3 stair nosing has a standard 12mm wide black anti-slip tape to cover fitting screws. We also offer safety yellow or photo-luminescent insert as an alternative. The insert is mainly fitted for aesthetic reasons and the profile can be installed without insert (this applies especially for fire escapes where combustibility may be an issue).

Standard Length The AS3 profile standard length is 4300mm. AS3 stair nosing can be cut to size and supplied ready for installation.

Custom Made Profiles We offer a design and manufacture service for specific applications. Please contact us for further information.