

# **Anti-Slip Safety Solutions Pty Ltd**

*Slip prevention, remedial cleaning & sealing specialists since 1996*


**CALL 1300 667 547 Mobile 0418 828 850**

**Fax: 02 9383 8575 or 1300 723 222 Website: [www.asssco.com.au](http://www.asssco.com.au)**

**Email: [info@asssco.com.au](mailto:info@asssco.com.au) PO Box 207 Concord NSW 2137**

**ABN 53 133 555 601**

## **AS4 PRODUCT INFORMATION SHEET**

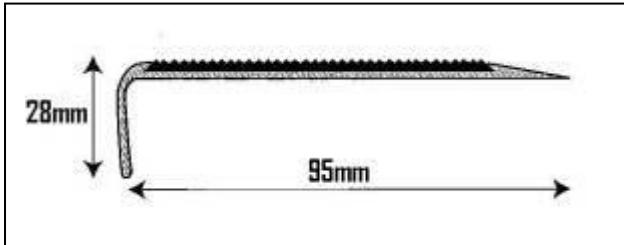

AS4 stair nosing has been designed for use on hard surfaces and is also suitable for vinyl and commercial style carpets. The nosing is fitted with PVC or anti-slip carborundum inserts. This profile can also be installed with a photo-luminescent insert.

**Aluminium** Our profiles are extruded from 6060/T5 Alloy; this can be interchanged with 6063/T5. Both alloys are architectural grade with good surface finish and very good corrosion resistance.

**Anodising** Aluminium profiles are anodised 15 – 20 microns in accordance with AS 1231:2000. The following finishes are available; Clear (Natural Silver) Gold (Summer Maize) and Bronze (Amber Gold).

**Powder Coating** (electrostatic powder spray) finishes are available in: Black and Claret. Custom anodising or powder coating is available on request.

**PVC Inserts** our insert material is lead free PPVC with UV stabilization. It has been formulated to comply with the requirements of the European RoHS directive, namely it does not contain any lead, cadmium, mercury or hexavalent chromium. Material property values: - specific gravity –ASTM D792, value 1.45. Hardness ASTM D2240, Shore A 80—85.






**Anti-Slip Carborundum insert** The insert has a thick carrier impregnated with aluminium oxide granules and acrylic adhesive. The anti-slip insert is formulated for resistance to both steam and detergent cleaning.

**Double Sided Tape** Our double-sided tape is made of non-woven rayon paper with high strength, long life acrylic adhesive. Typical adhesion characteristics are; Peel – 1.35kgf per 25mm, shear strength – 7.5kg per 25Sq mm

**Standard Length** The AS4 profile standard length is 4300mm. AS4 stair nosing can be cut to size and supplied ready for installation.

**Custom Made Profiles** We offer a design and manufacture service for specific applications. Please contact us for further information.

### **Insert Colour Chart (colour chart as a guide only)**

| <b>Black</b>                                                                        | <b>Pewter</b>                                                                       | <b>Tan</b>                                                                          | <b>Red</b>                                                                           | <b>Brown</b>                                                                          |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |